

KB-5152 (相当于 GB : 22F)

覆铜箔改性环氧纸芯玻璃布复合基层压板

Features 特点

- 优异的冲孔性，最佳冲孔温度为 45°C~70°C
Excellent punching property, Suitable for punching at 45°C~70°C
- 符合 IPC-4101B/10 的规范要求
IPC-4101B/10 specification is applicable.
- 不适应 PTH 制程
Plated through holes are not recommended for the cellulose core is easily attacked by the electrolyte.

General Properties 一般特性

Test Item 测试项目	Unit 单位	Test Method (IPC-TM-650) 测试方法	Test Condition 处理条件	Specification (IPC-4101B) 规范值	Typical Value 典型值
Peel Strength (1 oz.) 铜箔剥离强度	N/mm	2.4.8	125°C	AABUS	1.65
			Float 260°C / 10 Sec	AABUS	1.60
Thermal stress 热应力	Sec	2.4.13.1	Float 260°C/unetched	≥10	20
Bow / Twist 弯弓度/翘曲度	%	2.4.22.1	A	≤1.5	0.35/0.5
Flexural Strength 抗弯强度	N/mm ²	2.4.4	Warp	≥242	300
			Fill	≥172	240
Flammability 燃烧性	Rating	UL94	UL-94	UL94 V-0	V-0
Surface Resistivity 表面电阻	MΩ	2.5.17.1	C-96/35/90	≥1.0×10 ⁴	1.0×10 ⁶
Volume Resistivity 体积电阻	MΩ-cm	2.5.17.1	C-96/35/90	≥1.0×10 ⁶	1.0×10 ⁸
Dielectric Constant 介电常数	—	2.5.5.2	Etched/@1 MHZ	≤5.4	4.6
Loss Tangent 介质损耗	—	2.5.5.2	Etched/@1 MHZ	≤0.035	0.023
Arc Resistance 耐电弧性	Sec	2.5.1	D-48/50+D-0.5/23	≥60	125
Moisture Absorption 吸水率	%	2.6.2.1	D-24/23	≤0.5	0.25
Comparative Tracking Index 相比漏电起痕指数	V	IEC 60112	Etched/0.1% NH ₄ CL	AABUS	175

Remarks: Specimen Thickness: 1.6 mm 1/0 样品厚度: 1.6 mm 1/0

A = Keep the specimen originally without any process 保持原样, 不作处理

C = Temperature and humidity conditioning 在恒温恒湿的空气中处理


D = Immersing in distilled water with temperature control 浸在恒温的水中处理

E = Temperature conditioning 在恒温的空气中处理


KB-5152 (相当于 GB : 22F)

覆铜箔改性环氧纸芯玻璃布复合基层压板


Dimensional stability 尺寸稳定性

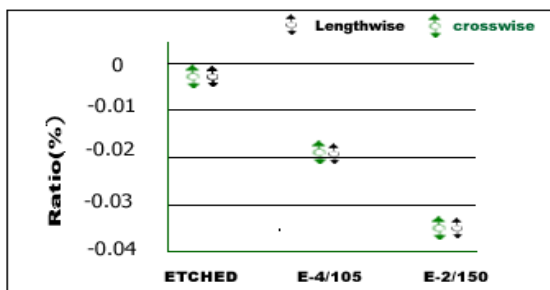

Thermal stress 耐热冲击性

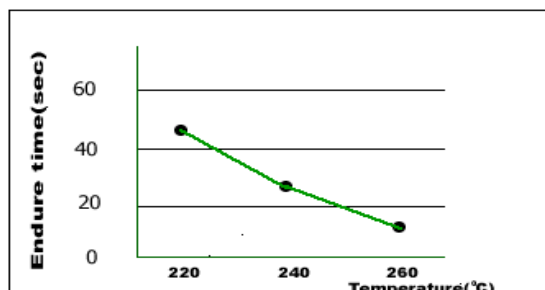

Warpage through PCB process (thickness 1.6mm single side)

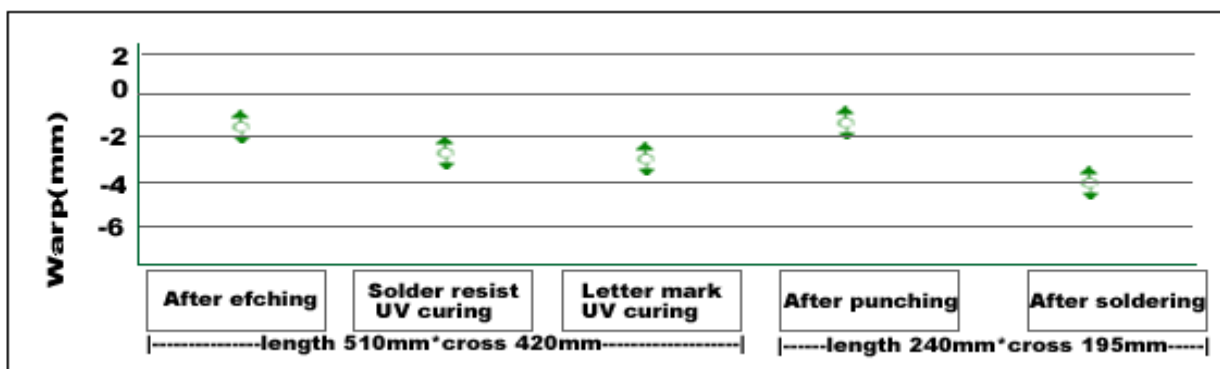

应用领域

- 显示器、录像机、电源基板、工业仪表、数码刻录机等

Applications

- Display, VCR, Power supply, Industrial Instrument, Digital sound recorder, etc.

Purchasing Information 采购信息

Type 类型	Thickness 厚度	Copper Cladding 铜箔厚度	Regular Size (mm) 常规尺寸	CTI Value CTI 值
KB-5152 22F	0.8mm ~ 1.6mm	18μm 35μm 70μm	915*1220mm (36"*48") 1020*1220mm (40"*48") 1067*1220mm (42"*48")	175V

Note: Other sheet size, thickness and flammability UL-94 V-1 rating products could be available upon request.
可根据客户要求提供其它尺寸、厚度及阻燃 UL-94 V-1 级产品。