

## KB-3151HS (ANSI: FR-1/JIS: PP7F)

## 覆铜箔酚醛树脂纸基层压板

## 特点

- 在高温下弓曲率、扭曲率小于 1.0%。
- 潮湿环境下电气性能优良。
- 适合之冲孔温度为 50~70℃。

## Features

- In high temperature warpage and twist both less than 1.0%.
- Superior electric properties under moisture condition
- Suitable for punching at 50~70℃.

## General Properties 一般特性

Test Item 测试项目	Unit 单位	Test Condition 处理条件	Testing Method 测试方法	Specification 规格值	Typical Value 典型值
Solder Resistance 耐浸焊性 (260℃)	Sec	A	JIS C 6481	≥10	20~30
Heat Resistance 耐热性	—	130℃ 30min	JIS C 6481	No Change 无异常	No Change 无异常
Peel Strength (Copper Foil 35 μ m) 铜箔剥离强度 (35 μ m 铜箔)	kgf/cm	A 260℃/5Sec	JIS C 6481	≥1.2	1.8~2.1 1.8~2.1
Flexural Strength 屈曲强度	Lengthwise 纵向	A	JIS C 6481	≥8	14-16
	Crosswise 横向			≥8	13-14
Volume Resistivity 体积阻抗系数	Ω-cm	C-96/20/65 C-96/20/65+C-96/40/90	JIS C 6481	≥1×10 <sup>11</sup> ≥1×10 <sup>10</sup>	1.0×10 <sup>12</sup> ~10 <sup>13</sup> 1.0×10 <sup>10</sup> ~10 <sup>11</sup>
Surface Resistivity 表面抗阻	Adhesive Side 粘接剂面	C-96/20/65 C-96/20/65+C-96/40/90	JIS C 6481	≥1×10 <sup>11</sup> ≥1×10 <sup>10</sup>	1.0×10 <sup>11</sup> ~10 <sup>12</sup> 1.0×10 <sup>10</sup> ~10 <sup>11</sup>
	Laminate Side 积层板面	C-96/20/65 C-96/20/65+C-96/40/90		≥1×10 <sup>11</sup> ≥5×10 <sup>9</sup>	1.0×10 <sup>10</sup> ~10 <sup>11</sup> 5.0×10 <sup>9</sup> ~10 <sup>10</sup>
Insulation Resistance 绝缘抗阻	Ω	C-96/20/65 C-96/20/65+D-2/100	JIS C 6481	≥1×10 <sup>11</sup> ≥1×10 <sup>8</sup>	1.0×10 <sup>11</sup> ~10 <sup>12</sup> 1.0×10 <sup>8</sup> ~10 <sup>9</sup>
Chemical Resistance 耐化学性	—	3% NaOH 40℃ 3min 3%氢氧化钠 40℃ 3分钟	JIS C 6481	No Change 无异常	No Change 无异常
		Boiled in trichloroethylene for 3 min 三氯乙烯中煮沸 3 分钟	JIS C 6481	No Change 无异常	No Change 无异常
Moisture Absorption 吸水率	%	E-24/50+D-24/23	JIS C 6481	≤1.3	0.8~1.0
Flammability 阻燃性	Rating	A	UL94	UL94 V-0	V-0
Dielectric Constant (1 MHz) 介电常数 (1 MHz)	—	C-96/20/65	JIS C 6481	≤5.5	4.0~5.0
		C-96/20/65+D-24/23		≤6.0	4.5~5.5
Dissipation Factor 介质损耗因子	—	C-96/20/65	JIS C 6481	≤0.05	0.025~0.035
		C-96/20/65+D-24/23		≤0.1	0.045~0.055
CTI Value CIT 值	V	0.1% NH <sub>4</sub> CL	IEC 112	≥600	600
Punching Temperature 冲孔温度	℃	A	GB/T4722	50-70	常温-70

Remarks: Typical values for reference only 注: 典型值仅作参考 Stand values according to JIS-C-6485 规格值参照 JIS-C-6485

A = Keep the specimen originally without any process 保持原样, 不作处理

C = Temperature and humidity conditioning 在恒温恒湿的空气中处理

D = Immersing in distilled water with temperature control. 浸在恒温的水中处理


E = Temperature conditioning 在恒温的空气中处理

### KB-3151HS (ANSI: FR-1/JIS: PP7F)

### 覆铜箔酚醛树脂纸基层压板


#### Speciality Chart 板材特性图

Warpage of PCB during processing/印制电路板加工时弯曲度(Thickness 1.6mm single side)

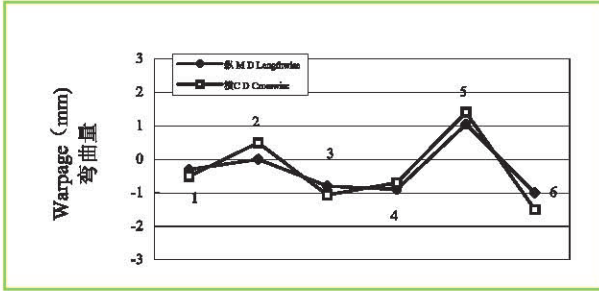


1. Feeding 投料	2. Heating at 130°C for 90 sec 130°C下加热 90 秒	3. Etching, Rinsing, Drying 蚀刻, 清洗, 烘干
4. Heating at 200°C for 30 sec 200°C下加热 30 秒	5. Punching at 50°C 50°C下冲孔	6. Soldering at 260°C for 5sec 260°C 焊锡 5 秒


Moisture absorption 吸水率

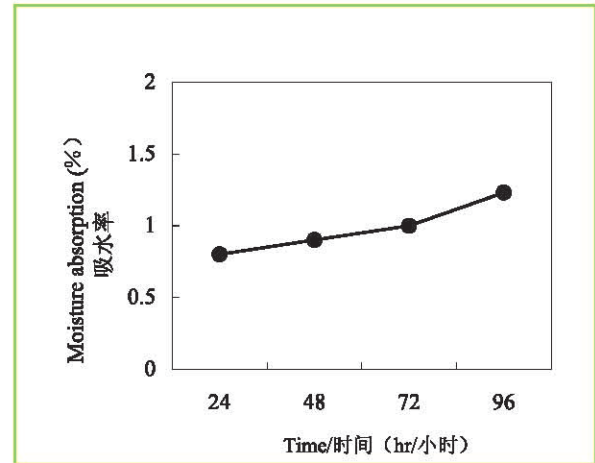

Punched hole shrinkage  
冲孔后孔径收缩

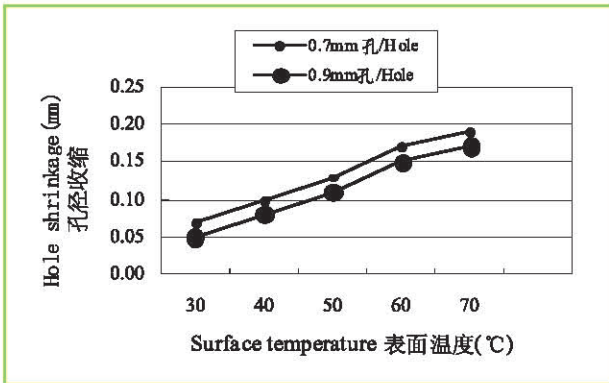

Dimensional change of punched PCB  
冲孔后之尺寸变化

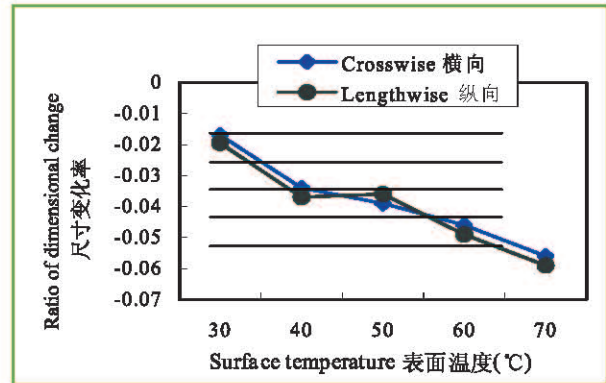

#### Purchasing Information 采购信息

Type 类型	Thickness 厚度	Copper Cladding 铜箔厚度	Regular Size (mm) 常规尺寸	CTI Value CTI 值
KB-3151HS FR-1	0.8mm ~ 1.6mm	35μm 70μm	1020*1020mm (40" * 40") 1020*1220mm (40" * 48")	600V

Note: Other sheet size and thickness could be available upon request.  
可根据客户要求提供其它尺寸和厚度。